
BIOCHAR CRUSHER

SPECIFICATIONS

- Multiple biochar chutes: Coarse ± 3mm & Fine 1 mm
- 120V/220V single phase input power
- Motor Overload Protection
- Fold-up platform and steps / small footprint
- Crushing Biochar throughput: 150 kg/hour
- Control Box with trip switches
- Crusher Motor FORWARD / REVERSE
- 2 Emergency Stop Buttons & 1 Isolator switch
- Hopper Safety Grating
- Hopper Cover lids to minimize dust
- Shaking sieve access hatch for easy cleaning




STOP

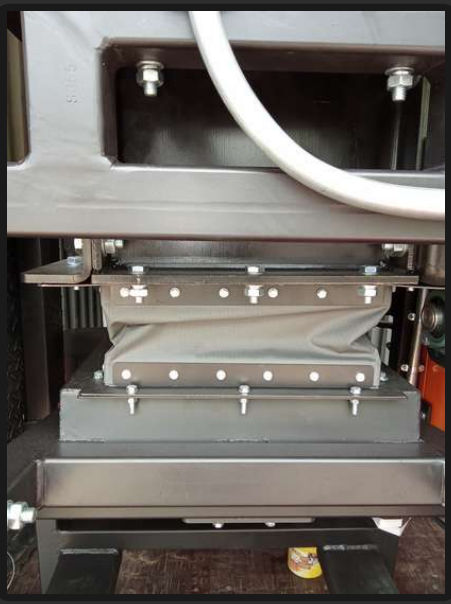


























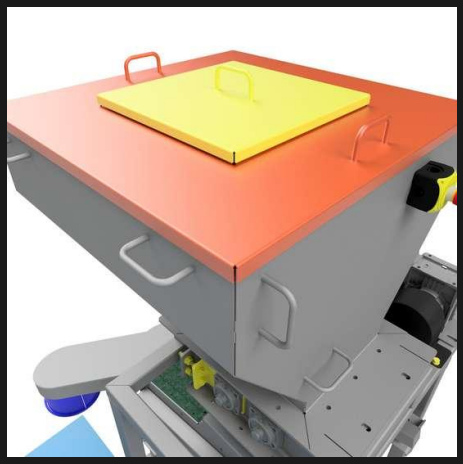



















Bio Agri Group
Biochar Crusher
bioagrigroup.co.za

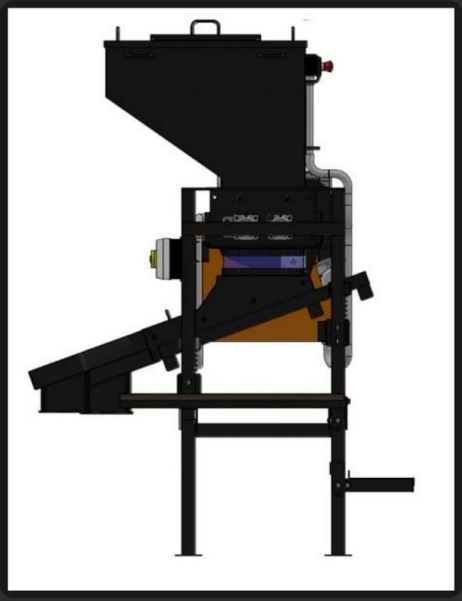





HEAD OFFICE

CAPE TOWN, SOUTH AFRICA

SATELLITE OFFICES

FRANCE · SWITZERLAND · TAIWAN

info@bioagrigroup.co.za

